BIEMMEDUE
heating, cleaning and drying

NEW

BWK - BWK BAT

ERBICIDA PROFESSIONALE AD ACQUA CALDA

PROFESSIONAL HOT WATER WEED REMOVAL SYSTEM

BWK/BWK BAT - ERBICIDA PROFESSIONALE AD ACQUA CALDA

- Innovativo sistema diserbante totale ad acqua calda. Elimina infestanti e malerbe in modo sostenibile, senza l'utilizzo di prodotti chimici, ma con la stessa efficacia
- Solo dopo poche ore dal trattamento termico è possibile verificare l'efficacia di BWK
- Effettuando l'azione di diserbo termico con periodicità, anche le radice della pianta verrà indebolita al punto da inibirne la crescita, eliminando la pianta stessa in modo definitivo. In genere, effettuando 4 o 5 trattamenti ogni stagione, dal secondo anno le piante ridurranno drasticamente la loro crescita, per poi scomparire in modo definitivo
- BWK ha un consumo d'acqua di soli 7.8 lt al minuto, e utilizza meno di 0.3 kw di energia elettrica
- Mediante una innovativa caldaia a gasolio, l'acqua necessaria al trattamento viene riscaldata in tempi rapidissimi, permettendo l'avvio rapido del lavoro e una temperatura sempre costante
- Disponibile anche in versione batteria
- BWK può essere utilizzata con molteplici accessori a scelta, in base alle specifiche esigenze, privilegiando la produttività o la rapidità oppure la precisione
- Protezione anticalcare per preservare da incrostazioni e intasamenti l'intera macchina
- Paraurti frontale e posteriore facilitano la movimentazione con automezzi e preservano da danneggiamenti
- Impiegabile su tutte le superfici (cemento, asfalto, aree piastrellate, terreno ecc)
- Ridotta rumorosità
- Facilità d'impiego

- *Innovation in total weed removal technology using hot water. Elimination of weed and unwanted grass with a sustainable, environmentally friendly method, and without the use of chemicals*
- *Efficient results of BWK already visible only 24 hours after the thermal treatment*
- *Repeated weed removal treatments by BWK, generally 4-5 times per season, will weaken the weeds' roots from the second year to reduce their re-growth and eventually cause their destruction and elimination*
- *BWK has a water consumption of only 7,8 liters per minute and an electrical consumption of only 0,3 kW*
- *The efficient diesel-powered boiler quickly heats the water to the necessary treatment temperature, allowing the operator to start working almost instantly and at a constant temperature*
- *Available also in battery*
- *BWK can be used with various accessories according to your specific needs for precision, high productivity or both*
- *Descaler to prevent limescale build-up and to protect the entire machine against clogging*
- *Front and rear bumpers to protect the machine against damage during vehicle transport*
- *Appropriate for use on all surfaces such as cement, asphalt, tiled floors, soil, etc.)*
- *Low-noise*
- *Easy to use*

ACCESSORI IN DOTAZIONE / *SUPPLIED ACCESSORIES*

N°	COD.	DESCRIZIONE - *DESCRIPTION*
1	01AC546	Lancia con impugnatura e maniglia l=105 cm in M22 out M22 *Lance with trigger and handle l= 105cm in M22 out M22*
2	01AC542	Ugello piatto *Flate nozzle*
3	01AC398	Tubo A.P. l= 10 m R2 - 5/16" M22-M22 *H.P. hose l=10 m R2 - 5/16" M22-M22*
4	092P18	1 lt additivo anticalcare *1 lt limescale inibitor*
5	RCVR00170	Portagomma innesto rapido *Hose connector*
6	RCVR00169	Presa Portagomma 3/4" - *Threaded tap adaptor 3/4"*

ACCESSORI A RICHIESTA/ *ACCESSORIES ON DEMAND*

UGELLO PIATTO ***FLAT NOZZLE***	**BARRA DI SPRUZZO l= 200mm** ***SPARY BAR l= 200 mm***	**BARRA DI SPRUZZO l= 500mm** ***SPARY BAR l= 500 mm***
Cod. 01AC542	**Cod.** 01AC543	**Cod.** 01AC544
SUPPORTO CON RUOTE PER BARRE E UGELLO PIATTO ***HOLDER WITH WEELS FOR SPARY BAR AND FLAT NOZZLE***	**AVVOLGITUBO IN ACCIAIO INOX AISI 304 - L max= 30 m** **STAINLESS STEEL AISI 304 HOSE REEL L max= 30 m**	**IDRO-CALC** **ADDITIVO ANTICALCARE** ***LIMESCALE INIBITOR***
Cod. 01AC545	**Mod.** BWK **Cod.** 01AC467	**Cod.** 092P18 1lt **Cod.** 092P09 10lt

BWK/BWK BAT - ERBICIDA PROFESSIONALE AD ACQUA CALDA
PROFESSIONAL HOT WATER WEED REMOVAL SYSTEM

KIT RUOTE/MANIGLIA *WHEELS/HANDLES KIT*	KIT PIEDI ANTIVIBRANTI *RUBBER FEET KIT*
Mod. BWK BAT **Cod.** 01AC563	**Mod.** BWK BAT **Cod.** 01AC564

PRIMA - *BEFORE*

DOPO - *AFTER*

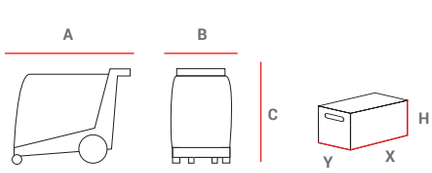

PESI E DIMENSIONI MACCHINA *WEIGHTS AND DIMENSIONS MACHINE*					IMBALLO *PACKAGING*			
MOD	A	B	C	Netto/*Net*	X	Y	H	Lordo/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
BWK	990	620	940	118	1.015	660	1.100	136
BWK BAT*	1.150	750	840	170	1.250	800	1.040	195

(*) Peso senza batteria - *Weight without battery*

		BWK	BWK BAT
codice - *code*		01BW01	01BW03
pressione max - *max pressure*	[bar] [Mpa - psi]	2 0,2 - 29	2 0,2 - 29
portata max - *max flow rate*	[lt/h]	480	480
pompa - *pump*		ottone - *brass*	ottone - *brass*
rotazione pompa - *pump speed*	[rpm]	1.450	1.450
potenza assorbita max - *max absorbed power*	[Kw]	0,4	0,4
alimentazione - *supply voltage*	[V-ph-Hz]	230-1-50	batteria 12V/*battery 12V dc*
temperatura max - *max temperature*	[°C]	95	95
serbatoio gasolio - *fuel tank*	[lt]	35	35
serbatoio anticalcare - *descaler tank*	[lt]	3	3

BIEMMEDUE S.p.A. Via Industria, 12 - 12062 Cherasco (CN) - Italy - T. +39 0172 486111 - F. +39 0172 488270
bm2@biemmedue.com - www.biemmedue.com