



## BWK - BWK BAT

ERBICIDA PROFESSIONALE AD ACQUA CALDA  
PROFESSIONAL HOT WATER WEED REMOVAL SYSTEM

## BWK/BWK BAT - ERBICIDA PROFESSIONALE AD ACQUA CALDA






- Innovativo sistema diserbante totale ad acqua calda. Elimina infestanti e malerbe in modo sostenibile, senza l'utilizzo di prodotti chimici, ma con la stessa efficacia
  - Solo dopo poche ore dal trattamento termico è possibile verificare l'efficacia di BWK
  - Effettuando l'azione di diserbo termico con periodicità, anche le radice della pianta verrà indebolita al punto da inibirne la crescita, eliminando la pianta stessa in modo definitivo. In genere, effettuando 4 o 5 trattamenti ogni stagione, dal secondo anno le piante ridurranno drasticamente la loro crescita, per poi scomparire in modo definitivo
  - BWK ha un consumo d'acqua di soli 7.8 lt al minuto, e utilizza meno di 0.3 kw di energia elettrica
  - Mediante una innovativa caldaia a gasolio, l'acqua necessaria al trattamento viene riscaldata in tempi rapidissimi, permettendo l'avvio rapido del lavoro e una temperatura sempre costante
  - Disponibile anche in versione batteria
  - BWK può essere utilizzata con molteplici accessori a scelta, in base alle specifiche esigenze, privilegiando la produttività o la rapidità oppure la precisione
  - Protezione anticalcare per preservare da incrostazioni e intasamenti l'intera macchina
  - Paraurti frontale e posteriore facilitano la movimentazione con automezzi e preservano da danneggiamenti
  - Impiegabile su tutte le superfici (cemento, asfalto, aree piastrellate, terreno ecc)
  - Ridotta rumorosità
  - Facilità d'impiego
  - Caricabatterie incorporato
- *Innovation in total weed removal technology using hot water. Elimination of weed and unwanted grass with a sustainable, environmentally friendly method, and without the use of chemicals*
  - *Efficient results of BWK already visible only 24 hours after the thermal treatment*
  - *Repeated weed removal treatments by BWK, generally 4-5 times per season, will weaken the weeds' roots from the second year to reduce their re-growth and eventually cause their destruction and elimination*
  - *BWK has a water consumption of only 7,8 liters per minute and an electrical consumption of only 0,3 kW*
  - *The efficient diesel-powered boiler quickly heats the water to the necessary treatment temperature, allowing the operator to start working almost instantly and at a constant temperature*
  - *Available also in battery*
  - *BWK can be used with various accessories according to your specific needs for precision, high productivity or both*
  - *Descaler to prevent limescale build-up and to protect the entire machine against clogging*
  - *Front and rear bumpers to protect the machine against damage during vehicle transport*
  - *Appropriate for use on all surfaces such as cement, asphalt, tiled floors, soil, etc.)*
  - *Low-noise*
  - *Easy to use*
  - *Built-in battery charger*



## ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

	N°	COD.	DESCRIZIONE - DESCRIPTION
	1	01AC546	Lancia con impugnatura e maniglia l=105 cm (in M22 out M22) Lance with trigger and handle l= 105cm (in M22 out M22)
	2	01AC542	Ugello piatto Flat nozzle
	3	01AC398	Tubo A.P. l= 10 m R2 - 5/16" M22-M22 H.P. hose l=10 m R2 - 5/16" M22-M22
	4	092P18	1 lt additivo anticalcare 1 lt limescale inhibitor
	5	B.RCVR00170	Portagomma innesto rapido Hose connector
	6	B.RCVR00169	Presca Portagomma 3/4" - Threaded tap adaptor 3/4"

## ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

IDRO-CALC ADDITIVO ANTICALCARE LIMESCALE INIBITOR	BARRA DI SPRUZZO l= 200mm SPARY BAR l= 200 mm	BARRA DI SPRUZZO l= 500mm SPARY BAR l= 500 mm
		
Cod. 092P18 1lt Cod. 092P09 10lt	Cod. 01AC543	Cod. 01AC544
SUPPORTO CON RUOTE PER BARRE E UGELLO PIATTO HOLDER WITH WHEELS FOR SPARY BAR AND FLAT NOZZLE	AVVOLGITUBO IN ACCIAIO INOX AISI 304 - L max= 30 m STAINLESS STEEL AISI 304 HOSE REEL L max= 30 m	
		
Cod. 01AC545	Mod. BWK Cod. 01AC467	

# BWK/BWK BAT - ERBICIDA PROFESSIONALE AD ACQUA CALDA PROFESSIONAL HOT WATER WEED REMOVAL SYSTEM

## ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND



KIT RUOTE/MANIGLIA WHEELS/HANDLES KIT	KIT PIEDI ANTIVIBRANTI RUBBER FEET KIT	BATTERIE GEL* GEL BATTERY*
	 4 pz/4 pcs	
<b>Mod.</b> BWK BAT <b>Cod.</b> 01AC563	<b>Mod.</b> BWK BAT <b>Cod.</b> 01AC564	<b>Mod.</b> BWK BAT 12 V - 140 Ah (345x170x285 mm - 37 kg) <b>Cod.</b> 121AC131

(\*) Caricabatterie incorporato - Built-in charger

PRIMA - BEFORE



DOPO - AFTER

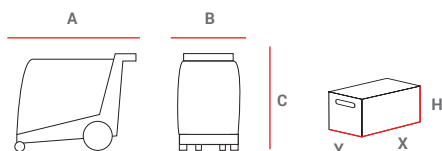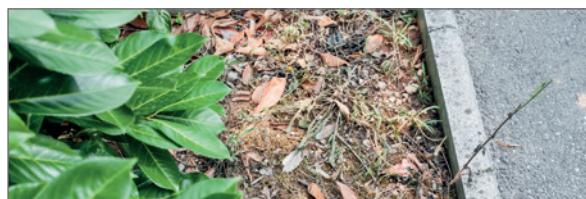

PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
BWK	990	620	940	118	1.050	720	1.120	136
BWK BAT*	1.150	750	850	170	1.250	800	900	195

(\*) Peso senza batteria - Weight without battery

		BWK	BWK BAT
codice - code		● 01BW01	● 01BW03
pressione max - max pressure	[ bar ] [ Mpa - psi ]	2 0,2 - 29	2 0,2 - 29
portata max - max flow rate	[ lt/h ]	480	480
pompa - pump		ottone - brass	ottone - brass
rotazione pompa - pump speed	[ rpm ]	1.450	1.450
potenza assorbita max - max absorbed power	[ Kw ]	0,4	0,4
alimentazione - supply voltage	[ V-ph-Hz ]	230-1-50	batteria 12V/battery 12V dc
temperatura max - max temperature	[ °C ]	95	95
serbatoio gasolio - fuel tank	[ lt ]	35	35
serbatoio anticalcare - descaler tank	[ lt ]	3	3

Batterie e caricabatterie non inclusi - Battery and battery charger not included